

**DO NOT SCALE**

**General**

- For all notes and specifications refer drawing No. 001.
- For Sections refer to drawing No's 101 & 102.
- For standard drainage details refer drawing No's 111 & 112

R02	04.04.22	AH	IMH ON PLOTS 9-11 ALTERED	IH	IH
R01	07.10.20	WY	INITIAL ISSUE	JA	IH
REV	DATE	BY	DESCRIPTION	CHK	APPD

DRAWING STATUS: **PRELIMINARY**

HCE	HCE Limited Canolfan Gorseion Centre Millers Drive Gorseion SA4 4QN
	Civil Engineering Structural Engineering Structural Surveys Project Management Petrochemical
	Tel: 01792 805010 E-mail: info@hcelimited.com Web: www.hcelimited.com

CLIENT: **HAYWOOD HOMES**

ARCHITECT: **ZEBRA ARCHITECTS**


PROJECT: **RESIDENTIAL DEVELOPMENT  
GWAELOD Y MAES  
LLANGENNECH**

TITLE: **FOUL WATER DRAINAGE SCHEDULE**

SCALE: 1:1	N.T.S.	CHECKED: JA	APPROVED: IH
CAD FILE: HCE-1386-103	DESIGN-DRAWN: AH	DATE: 07.10.20	
PROJECT No: 1386	DRAWING No: 103	REV: R02	

NU MB ER	EAST INGS	NOR THIN GS	COV ER LEV EL	M H SI ZE (m)	M H T Y P E	CO VE R T Y P E	PIPE INVER T (m) & DIA (mm)	DEPTH TO SOFFIT	CONNE CTION S
F.55	256495.309	202121.584	10.150m	450	4	B125	0.9.430 110 1.9.430 110	0.605	
F.56	256515.377	202108.307	10.150m	450	4	B125	0.8.910 110 1.8.910 110 2.8.910 110	1.125	
F.57	256522.750	202101.679	9.750m	450	4	B125	0.8.785 160 1.8.785 110 2.8.785 110 3.8.785 110	0.800	
F.58	256528.984	202096.079	9.750m	450	4	B125	0.8.890 110 1.8.890 110 2.8.890 110	0.745	
F.59	256533.556	202101.163	9.750m	450	4	B125	0.8.975 110 1.8.975 110	0.660	
F.60	256532.169	202112.152	9.750m	450	4	B125	0.8.960 110 1.8.960 110 2.8.960 110 *EXG FOUL	0.625	
F.61	256526.926	202121.266	10.150m	450	4	B125	0.9.100 110 1.9.100 110 2.9.100 110	0.935	
F.62	256534.355	202114.584	9.750m	450	4	B125	0.8.980 110 1.8.980 110 2.8.980 110	0.605	
F.63	256542.168	202111.131	9.750m	450	4	B125	0.9.075 110 1.9.075 110	0.560	
F.64	256487.576	202167.471	10.630m	1200	2	D400	0.8.390 300* 1.8.390 300* 2.8.390 160	1.935	
F.65	256490.711	202164.652	10.300m	1200	2	B125	0.8.445 160 1.8.445 160 2.8.445 160	1.690	
F.66	256501.053	202155.378	10.150m	900	3	D400	0.9.050 110 1.9.050 110	0.985	
F.67	256532.059	202126.976	10.150m	450	4	B125	0.9.195 110 1.9.195 110 2.9.195 110	0.840	
F.68	256505.311	202160.109	10.150m	450	4	B125	0.9.265 110 1.9.265 110	0.770	
F.69	256511.077	202154.925	10.150m	450	4	B125	0.9.360 110 1.9.360 110	0.675	
F.70	256518.279	202148.448	10.150m	450	4	B125	0.9.485 110 1.9.485 110	0.550	

NU MB ER	EAST INGS	NOR THIN GS	COV ER LEV EL	M H SI ZE (m)	M H T Y P E	CO VE R T Y P E	PIPE INVER T (m) & DIA (mm)	DEPTH TO SOFFIT	CONNE CTION S
F.37	256506.394	202073.199	9.750m	450	4	B125	0.8.655 110 1.8.655 110 2.8.655 110	0.980	
F.38	256508.238	202075.250	9.750m	450	4	B125	0.8.690 110 1.8.690 110	0.945	
F.39	256502.986	202069.407	9.750m	450	4	B125	0.8.720 110 1.8.720 110 2.8.720 110	0.915	
F.40	256477.422	202106.268	10.150m	450	4	B125	0.8.390 110 1.8.390 110 2.8.390 110	1.645	
F.41	256460.232	202128.951	10.500m	450	3	B125	0.8.275 110 1.8.275 110	2.110	
F.42	256464.937	202124.720	10.500m	450	3	B125	0.8.355 110 1.8.355 110 2.8.355 110	2.030	
F.43	256481.875	202111.221	10.150m	450	4	B125	0.8.475 110 1.8.475 110	1.560	
F.44	256493.274	202101.576	10.150m	450	4	B125	0.8.580 110 1.8.580 110 2.8.580 110	1.455	
F.45	256508.182	202089.056	10.150m	450	4	B125	0.8.810 110 1.8.810 110	1.225	
F.46	256515.991	202082.313	9.750m	450	4	B125	0.8.875 110 1.8.875 110	0.760	
F.47	256497.544	202106.325	10.150m	450	4	B125	0.8.660 110 1.8.660 110	1.375	
F.48	256512.388	202093.732	10.150m	450	4	B125	0.8.730 110 1.8.730 110 2.8.730 110	1.305	
F.49	256514.180	202092.120	9.750m	450	4	B125	0.8.700 160 1.8.700 110 2.8.700 160 3.8.700 110	0.885	
F.50	256520.064	202086.844	9.750m	450	4	B125	0.8.800 110 1.8.800 110 2.8.800 110	0.835	
F.51	256471.369	202143.103	10.500m	450	4	B125	0.9.025 110 1.9.025 110	1.360	
F.52	256476.060	202138.887	10.500m	450	4	B125	0.9.165 110 1.9.165 110 2.9.165 110	1.350	
F.53	256484.869	202130.972	10.500m	450	4	B125	0.9.255 110 1.9.255 110 2.9.255 110	1.2450	
F.54	256489.478	202126.827	10.500m	450	4	B125	0.9.330 110 1.9.330 110 2.9.330 110	1.1700	

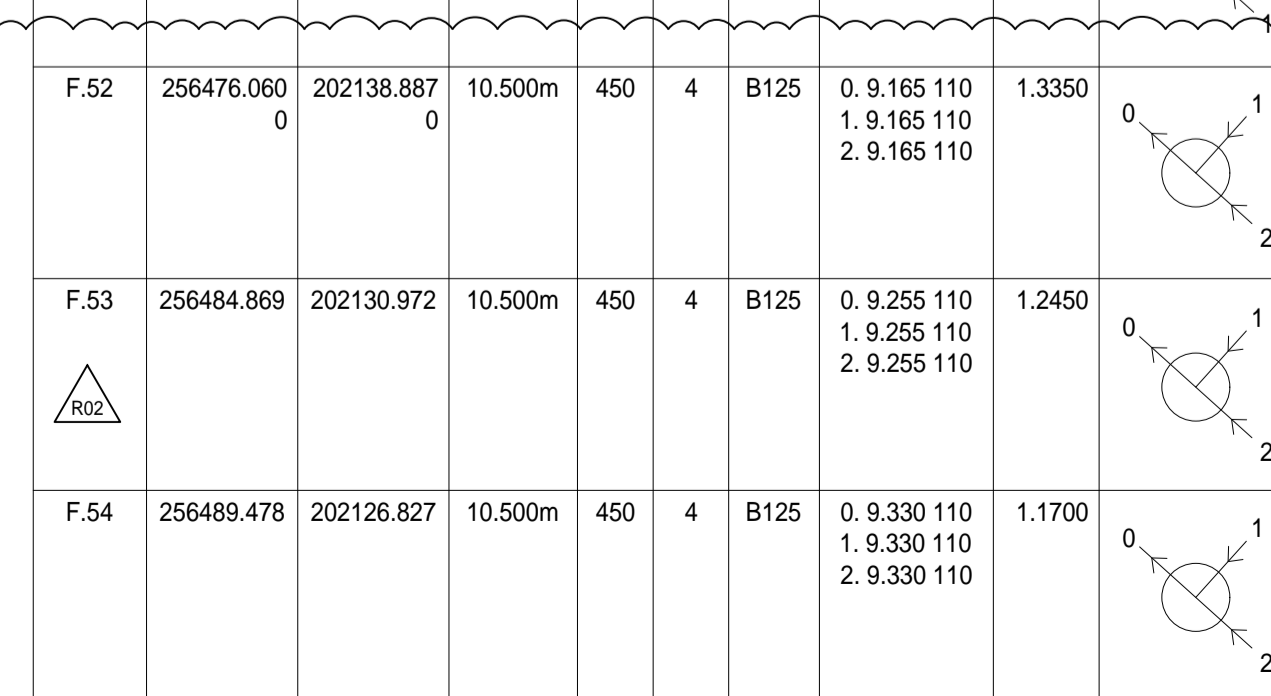

NU MB ER	EAST INGS	NOR THIN GS	COV ER LEV EL	M H SI ZE (m)	M H T Y P E	CO VE R T Y P E	PIPE INVER T (m) & DIA (mm)	DEPTH TO SOFFIT	CONNE CTION S
F.19	256473.690	202064.888	10.150m	450	4	B125	0.8.890 110 1.8.890 110 2.8.890 110 3.8.890 110	1.145	
F.20	256488.819	202051.687	9.750m	450	4	B125	0.8.855 110 1.8.855 110 2.8.855 110	0.780	
F.21	256489.318	202052.243	9.750m	450	4	B125	0.8.845 110 1.8.845 110 2.8.845 110 3.8.845 110	0.790	
F.22	256459.657	202082.451	10.150m	450	4	B125	0.9.370 110 1.9.370 110	0.665	
F.23	256437.511	202104.966	10.500m	450	4	B125	0.8.965 110 1.8.965 110	1.420	
F.24	256484.140	202058.741	9.750m	450	4	B125	0.8.740 160 1.8.740 110 2.8.740 110 3.8.740 110	0.845	
F.25	256441.726	202101.170	10.500m	450	4	B125	0.8.895 110 1.8.895 110	1.490	
F.26	256449.196	202094.452	10.325m	450	4	B125	0.9.140 110 1.9.140 110 2.9.140 110	1.070	
F.27	256452.308	202091.657	10.325m	450	4	B125	0.9.190 110 1.9.190 110	1.020	
F.28	256502.468	202068.833	9.750m	450	4	B125	0.8.730 110 1.8.730 110 2.8.730 110	0.905	
F.29	256517.262	202066.346	9.750m	450	4	B125	0.8.970 110 1.8.970 110 2.8.970 110	0.665	
F.30	256483.376	202089.356	10.150m	450	4	B125	0.8.470 110 1.8.470 110 2.8.470 110 *EXG FOUL	1.565	
F.31	256512.401	202060.941	9.750m	450	4	B125	0.8.880 110 1.8.880 110 2.8.880 110	0.755	
F.32	256447.843	202125.836	10.630m	1200	2	D400	0.8.095 300* 1.8.095 300* 2.8.095 160	2.230	
F.33	256453.143	202121.070	10.500m	1200	2	B125	0.8.140 160 1.8.140 110 2.8.140 110 3.8.140 160	2.195	
F.34	256473.927	202102.381	10.150m	450	4	B125	0.8.325 160 1.8.325 110 2.8.325 160	1.660	
F.35	256485.024	202092.400	10.150m	450	4	B125	0.8.425 160 1.8.425 110 2.8.425 160 3.8.425 110	1.560	
F.36	256501.271	202077.792	9.750m	900	3	B125	0.8.570 160 1.8.570 160 2.8.570 110 3.8.570 160	1.015	

NU MB ER	EAST INGS	NOR THIN GS	COV ER LEV EL	M H SI ZE (m)	M H T Y P E	CO VE R T Y P E	PIPE INVER T (m) & DIA (mm)	DEPTH TO SOFFIT	CONNE CTION S
F.01	256449.503	202052.880	10.150m	450	4	B125	0.9.360 110 1.9.360 110	0.805	
F.02	256458.657	202044.649	10.150m	450	4	B125	0.9.205 110 1.9.205 110	0.945	
F.03	256477.127	202038.686	9.750m	450	4	B125	0.9.085 110 1.9.085 110 2.9.085 110	0.665	
F.04	256474.536	202035.804	9.750m	450	4	B125	0.9.135 110 1.9.135 110	0.615	
F.05	256454.243	202058.152	10.150m	450	4	B125	0.9.450 110 1.9.450 110	0.700	
F.06	256463.950	202050.535	10.150m	450	4	B125	0.9.105 110 1.9.105 110 2.9.105 110	1.045	
F.07	256471.033	202044.165	9.750m	450	4	B125	0.8.985 110 1.8.985 110 2.8.985 110 *EXG FOUL	0.715	
F.08	256419.935	202094.691	10.790m	1200	2	D400	0.7.935 300* 1.7.935 300* 2.7.935 110	2.550	
F.09	256426.600	202088.687	10.500m	900	3	B125	0.8.235 110 1.8.235 110 2.8.235 110 3.8.235 110	2.150	
F.10	256431.853	202083.960	10.500m	900	3	B125	0.8.470 110 1.8.470 110	1.915	
F.11	256447.509	202070.576	10.150m	450	4	B125	0.9.350 110 1.9.350 110 2.9.350 110	0.685	
F.12	256441.115	202076.326	10.150m	450	4	B125	0.9.455 110 1.9.455 110 2.9.455 110	0.580	
F.13	256442.234	202064.710	10.150m	450	4	B125	0.9.450 110 1.9.450 110 2.9.450 110	0.585	
F.14	256434.607	202093.253	10.500m	1200	4	B125	0.8.540 110 1.8.540 110 2.8.540 110	1.845	
F.15	256442.064	202086.536	10.325m	450	4	B125	0.8.875 110 1.8.875 110 2.8.875 110	1.335	
F.16	256448.785	202080.486	10.150m	450	4	B125	0.9.175 110 1.9.175 11		